

## Regressed Tilt Low Profile Flush-Fit LED Downlights

(t) 01372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk

### TECHNICAL DATA



Supply: 230Vac 6.5W


Electrical Safety: ClassII (No Earth Reqd.)

Ingress Protection: IP44 (Optional IP65 Bezel, with Clear Glass Lens, Part No: 40401.10)

Light Source: 6W COB LED

Bezel Finish: White (other finishes available)

Dimensions: (in mm)

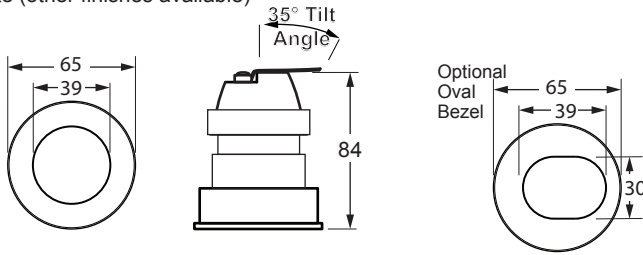

Part No. 40168.-- 40169.-- 40170.-- 40171.--

CCT:	2800K	4000K	2800K	4000K
	Warm	Cool	Warm	Cool
	White	White	White	White

Beam Angle:	36°	36°	36°	36°
-------------	-----	-----	-----	-----

Luminous Flux:	600Lm	630Lm	600Lm	630Lm
----------------	-------	-------	-------	-------

L.E.D. Driver: Mains Dimmable      DALI Dimmable ... Contact Flairlight for other dimming options



### INSTALLATION ..... IMPORTANT ... READ PAGE 2 BEFORE STARTING INSTALLATION



Isolate the electrical supply before undertaking any electrical work.

Installation must comply with the current wiring and building regulations.

