

**Article no.: 131006**

Ground- / Wall- / Ceiling lamp, Mini II CW, silver-gray, 220-240V AC/50-60Hz, 2,00 W, coldwhite

**Technical Data****General Characteristics**

Material	aluminum die casting
Colour	silver-gray
Optics	
included in delivery	2 m connection cable

**Electrical Characteristics**

Power / power consumption	2,00 W / 3,00 W
Input Voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	Powerplug
Protection class I, II, III	I

**Light Technical Data**

Bulb	LED-module fixed
Colour Designation	coldwhite
Colour temperature	6000 K
Luminous flux	180 lm
Beam angle	25°
LED type	High Power
LED quantity	1
Spectral power distribution	521 nm



## Article no.: 131006

Ground- / Wall- / Ceiling lamp, Mini II CW, silver-gray, 220-240V AC/50-60Hz, 2,00 W, coldwhite

### Light Direction

Rotating and tilting range	rotatable-swivel
Angle of inclination	
Radiation direction	
Reflector / lense	symmetrisch


### Dimensions & Weight

Length	
Width	85 mm
Height	85 mm
Diameter	42 mm
Product Weight	391 g

### Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP65/IP44

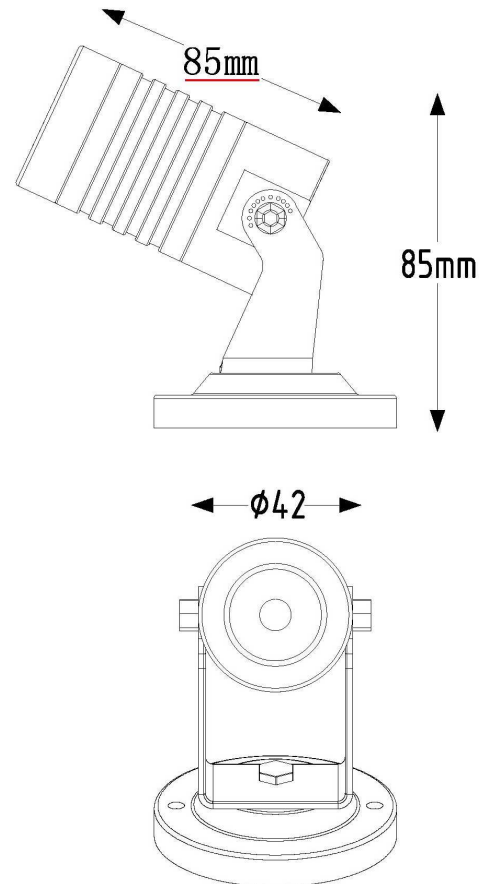

## Article no.: 131006

Ground- / Wall- / Ceiling lamp, Mini II CW, silver-gray, 220-240V AC/50-60Hz, 2,00 W, coldwhite

### General product data

#### Environmental Characteristics

Energy label	A+
Energy consumption	4 kWh/1000h

#### Lifespan

Lamp life time	25000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	100000

#### IP65/IP44



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person