

Article no.: 343022

Floor lamp, Office One Transparent, dimmable, White aluminium RAL 9006, 200-240V AC/50-60Hz, 50,00 W, neutral white

Technical Data

General Characteristics

Material	aluminum
Colour	White aluminium RAL 9006
Optics	
included in delivery	incl. 2,5 m connector cable with power plug

Electrical Characteristics

Power / power consumption	50,00 W / 55,00W
Input Voltage	200-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	touch switch dimmable
Connection possibility	Powerplug
Protection class I, II, III	I

Light Technical Data

Bulb	LED-module fixed
Colour Designation	neutral white
Colour temperature	4000 K
Luminous flux	6200 lm
Beam angle	150°/150°
LED type	SMD
LED quantity	192
Spectral power distribution	578 nm



Article no.: 343022

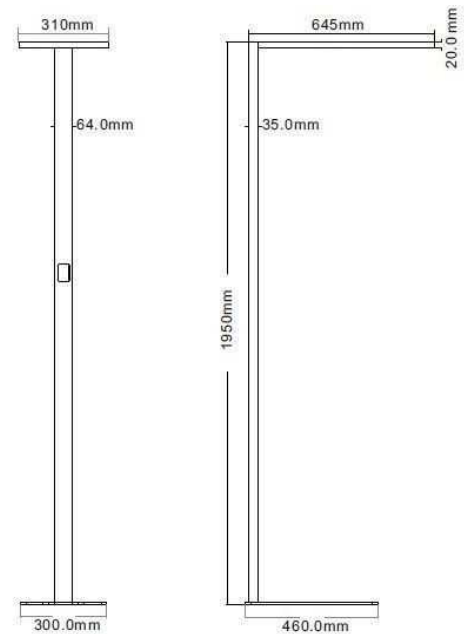
Floor lamp, Office One Transparent, dimmable, White aluminium RAL 9006, 200-240V AC/50-60Hz, 50,00 W, neutral white

Light Direction

Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	2 Side
Reflector / lense	

Dimensions & Weight

Length	1950,00
Width	310,00
Height	20,00
Diameter	0,00
Product Weight	11900 g

**Absolute maximum ratings**

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-20°C - +45°C
Storage temperature	-40°C - +80°C
IP - Code	IP20

Article no.: 343022

Floor lamp, Office One Transparent, dimmable, White aluminium RAL 9006, 200-240V AC/50-60Hz, 50,00 W, neutral white

General product data

Environmental Characteristics

Energy label	
Energy consumption	55 kWh/1000h

Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	25000

IP20

Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.



Lightings of Protection Class I

in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person