

Article no.: 343016

Floor lamp, Office Two, White aluminium RAL 9006, 200-240V AC/50-60Hz, neutral white

Technical Data**General Characteristics**

Material	aluminum
Colour	White aluminium RAL 9006
Optics	
included in delivery	incl. 2,5 m connector cable with power plug

Electrical Characteristics

Power	80,00 W
Input Voltage	200-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of Bases	
Power supply unit	excl. LED-power supply unit
Electronically reversible	dimnable
Connection possibility	Powerplug
Protection class I, II, III	I

Light Technical Data

Bulb	Lichtquelle fest
Colour Designation	neutral white
Colour temperature	4000 K
Luminous flux	8300 lm
Beam angle / UGR	110° / 90° / <19
LED type	SMD
LED quantity	288
Spectral power distribution	578 nm



Article no.: 343016

Floor lamp, Office Two, White aluminium RAL 9006, 200-240V AC/50-60Hz, neutral white

Light Direction


Rotating and tilting range	
Angle of inclination	
Radiation direction	2 Side
Reflector / lense	

Dimensions & Weight

Length	1950,00
Width	280,00
Height	42,00
Diameter	0,00
Product Weight	14000 g

Absolute maximum ratings

Working temperature	-20°C - +45°C
Storage temperature	-40°C - +80°C
IP - Code	IP20

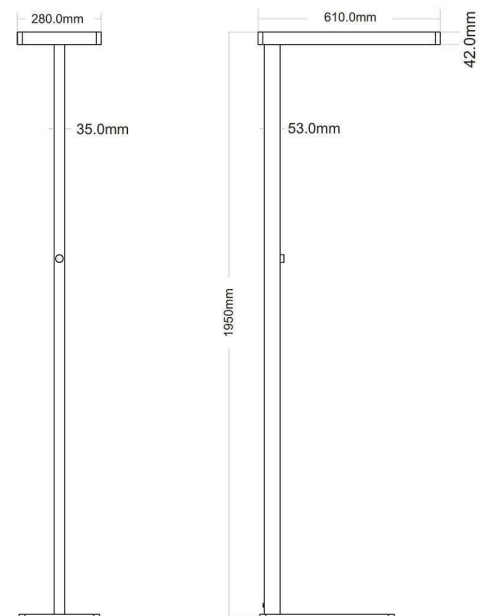

Article no.: 343016



Floor lamp, Office Two, White aluminium RAL 9006, 200-240V AC/50-60Hz, neutral white

Environmental Characteristics

Energy label	E
Energy consumption	80 kWh/1000h

Lifespan

Lamp life time	50000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	25000

EEI	This product contains a light source of energy efficiency class E
IP20	Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.
	Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.
	Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.