


## 40101.10 Pin-Hole Spot Tilt Regressed LED Downlight

(t) 01372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk

### TECHNICAL DATA

Light Engine:	9W Cree1512 COB LED
Luminous Flux:	900 Lumens
Colour Temp. (CCT):	3000K (Warm White)
Colour Consistency:	2-Step MacAdam Ellipse
Colour Rendering (CRI):	90 Ra Minimum
Efficacy:	75 Lm. per Circuit Watt
Beam Angle:	36°
Luminaire:	Illuminance: 230 Lux @ 2.7m Ingress Protection: IP20 Material: Die-Cast Aluminium Finish: Matt White Bezel, Black Inner Baffle
LED Driver: (Included)	Pre-Wired, Mains Dimmable (Leading or Trailing Edge Type) * Other dimming options available Input: 230Vac 0.055A 12W p.f. 0.9 Output: 250mA 40Vdc Max. Electrical Safety: Class III (SELV)
Weight:	410g (Incl. Driver)

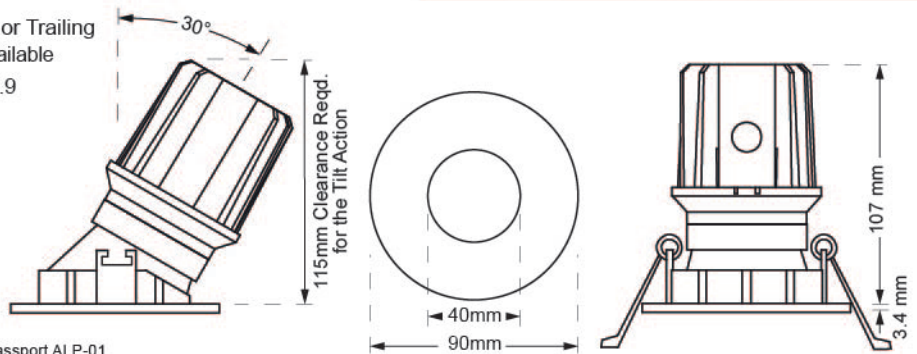

Measurements obtained using Spectroradiometer LT-SM999 and Lighting Passport ALP-01

### INSTALLATION INSTRUCTIONS



Isolate electrical supply before undertaking any electrical work.

Installation must comply with the current wiring and building regulations.



Suitable for mounting on normally flammable surfaces

