

40113.10 Tilt Regressed LED Downlight

TECHNICAL DATA




Light Engine: 12W Cree1512 COB LED
 Luminous Flux: 1200 Lumens
 Colour Temp. (CCT): 3000K (Warm White)
 Colour Consistency: 2-Step MacAdam Ellipse
 Colour Rendering (CRI): 90 Ra Minimum
 Efficacy: 75 Lm. per Circuit Watt
 Beam Angle: 36°

Luminaire: Illuminance: 350 Lux @ 2.7m
 Ingress Protection: IP20
 Material: Die-Cast Aluminium
 Finish: Matt White Bezel and Inner Baffle

LED Driver: Pre-Wired, Mains Dimmable (Leading or Trailing Edge Type) * Other dimming options available
 (Included) Input: 230Vac 0.075A 16W p.f. 0.9
 Output: 350mA 40Vdc Max.
 Electrical Safety: Class III (SELV)

Weight: 410g (Incl. Driver)

Measurements obtained using Spectroradiometer LT-SM999 and Lighting Passport ALP-01

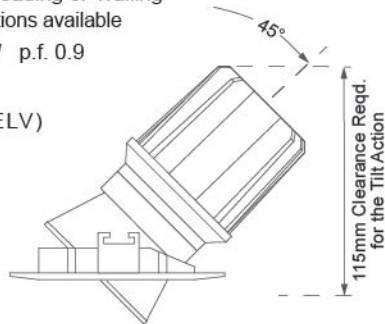

INSTALLATION INSTRUCTIONS



Isolate electrical supply before undertaking any electrical work.

Installation must comply with the current wiring and building regulations.



Suitable for mounting on normally flammable surfaces

