

TECHNICAL DATA



Luminaire: Illuminance: 290 Lux @ 2.7m
 Ingress Protection: IP65
 Material: Bezel; Die-Cast Aluminium, Lens; Glass
 Finish: Matt White Bezel with Clear Glass Lens and Black Inner Baffle



Light Engine: 15W Cree 1512 COB LED
 Luminous Flux: 1160 Lumens
 Colour Temp. (CCT): 3000K (Warm White)
 Colour Consistency: 2-Step MacAdam Ellipse
 Colour Rendering (CRI): 90 Ra Minimum
 Efficacy: 72 Lm. per Circuit Watt
 Beam Angle: 36°

LED Driver: Pre-Wired, Mains Dimmable (Leading or Trailing Edge Type) * Other dimming options available
 (Included) Input: 230Vac 0.075A 16W p.f. 0.9
 Output: 350mA 40Vdc Max.
 Electrical Safety: Class III (SELV)

Weight: 410g (Incl. Driver)

Designed in
London by
Flairlight

Photometric measurements from Spectrometer ALP-01, Spectroradiometer LT-SM999

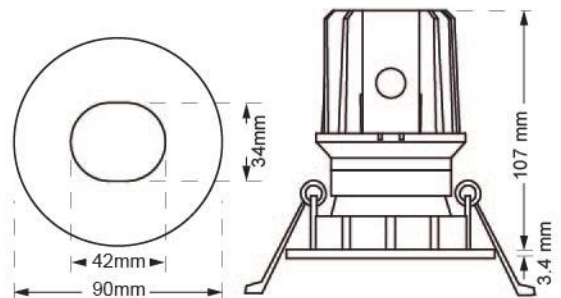

INSTALLATION INSTRUCTIONS



Isolate electrical supply before undertaking any electrical work.

Installation must comply with the current wiring and building regulations.



IP65 Protected against spraying water



Suitable for mounting on normally flammable surfaces

