

## Regressed Tilt Flush-Fit LED Downlights

(t) 01372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk




### TECHNICAL DATA



Supply: 230Vac  
 Electrical Safety: ClassII (No Earth Reqd.)  
 Ingress Protection: IP44 (Optional IP65 Bezel, with Clear Glass Lens, Part No: 40401.10)

Light Source: 10W COB LED Light Engine with Integral Dimmable Driver

Bezel Finish: White (other finishes available) 35° Tilt Angle

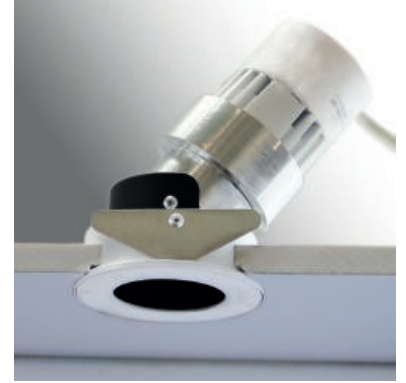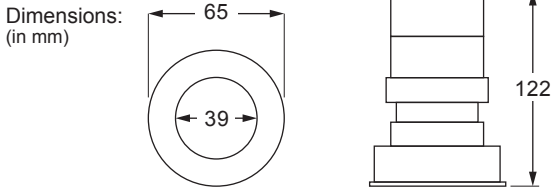


Part No.	40228.--	40229.--	40230.--	40231.--	40232.--	40233.--	40234.--	40235.--	40236.--	40237.--	40238.--	40239.--	40240.--	40241.--
CCT:	2800K Warm White	4000K Cool White	2800K Warm White	4000K Cool White	2800K 1800K Dim to Warm	2800K 1800K	2800K Warm White	4000K Cool White	2800K Warm White	4000K Cool White	2800K Warm White	4000K Cool White	2800K Warm White	4000K Cool White
Beam Angle:	24°	24°	36°	36°	24°	36°	24°	24°	36°	36°	24°	24°	36°	36°
Luminous Flux:	890Lm	930Lm	890Lm	930Lm	890Lm	890Lm	890Lm	930Lm	890Lm	930Lm	890Lm	930Lm	890Lm	930Lm
Dimming:	Mains Dimmable				Bluetooth Dimmable				ZigBee Dimmable					

### INSTALLATION ..... IMPORTANT ... READ PAGE 2 BEFORE STARTING INSTALLATION



Isolate the electrical supply before undertaking any electrical work.

Installation must comply with the current wiring and building regulations.

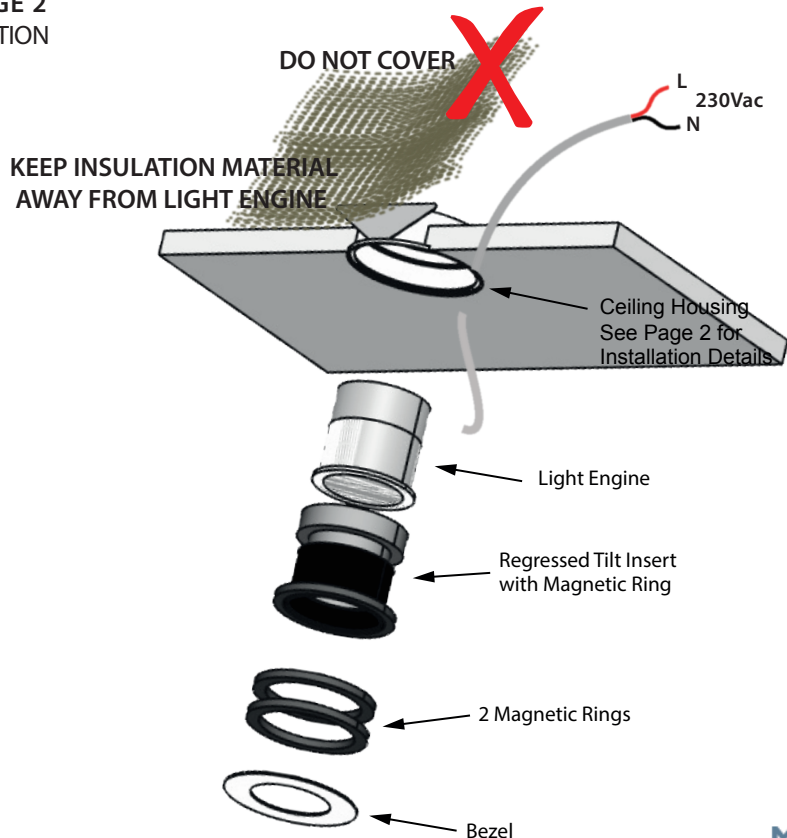

Drawing for illustrative purposes only, not exact representation of the product.

