

Fire Rated Fixed Flush-Fit LED Downlights

(t) 01372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk


TECHNICAL DATA



Supply: 230Vac
 Safety: ClassII (No Earth Req'd.)
 Ingress Protection: IP44 (Optional IP65 Bezel, with Clear Glass Lens, Part No: 40401.10)
 Fire Rating: 60 Mins. (BS476 Part 21)
 Light Source: 10W LED Light Engine with Integral Dimmable Driver
 Bezel Finish: White (other finishes available)



Dimensions:
(in mm)

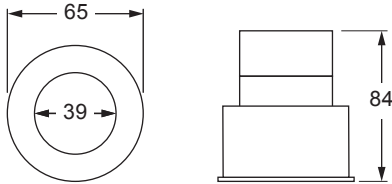


Part No.	40242.--	40243.--	40244.--	40245.--	40246.--	40247.--	40248.--	40249.--	40250.--	40251.--	40252.--	40253.--	40254.--	40255.--
CCT:	2800K	4000K	2800K	4000K	2800K	2800K	2800K	4000K	2800K	4000K	2800K	4000K	2800K	4000K
	Warm	Cool	Warm	Cool	1800K	1800K	Warm	Cool	Warm	Cool	Warm	Cool	Warm	Cool
	White	White	White	White	↓ Dim to Warm ↓	White	White	White	White	White	White	White	White	White
Beam Angle:	24°	24°	36°	36°	24°	36°	24°	24°	36°	36°	24°	24°	36°	36°
Luminous Flux:	890Lm	930Lm	890Lm	930Lm	890Lm	890Lm	890Lm	930Lm	890Lm	930Lm	890Lm	930Lm	890Lm	930Lm
Dimming:	Mains Dimmable				Bluetooth Dimmable				ZigBee Dimmable					

INSTALLATION IMPORTANT ... READ PAGE 2 BEFORE STARTING INSTALLATION



Isolate the electrical supply before undertaking any electrical work.

Installation must comply with the current wiring and building regulations.

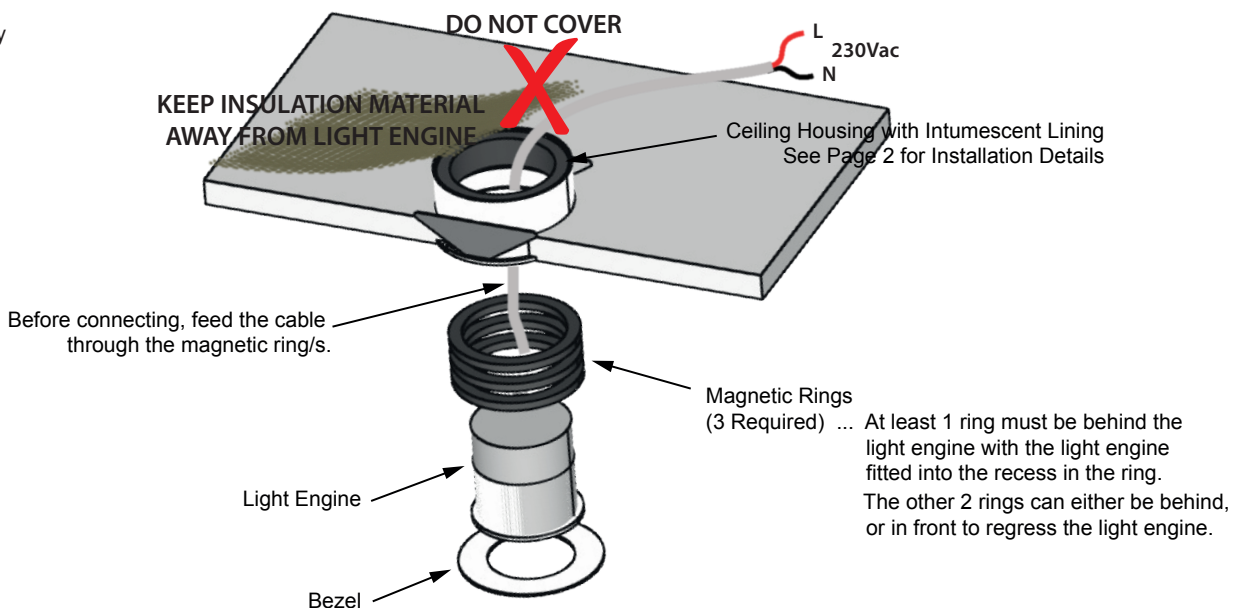

Drawing for illustrative purposes only, not an exact image of actual product.



Copyright © Flairlight Designs Ltd 2017. Flairlight reserve the right to change product design and/or specification without prior notice. E & OE

Do not disposed of these products with normal waste, use an authorised electrical recycling/disposal facility.



Retain this document for future reference.