

PureLED

41000.10 Regressed Fixed Downlight

(t) 0 1372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk

TECHNICAL DATA



Luminaire:

Ingress Protection Rating IP65

Beam Angle: 36°

Ingress Protection: IP65

Bezel Finish: Matt White Textured Paint

LED Driver: Input: 230Vac 0.050A 12W p.f. >0.9

Output: 350mA 18-38Vdc

Electrical Safety: Class II Pre-Wired Input Cable

Mains Dimmable with Leading or Trailing Edge Dimmers

Light Engine: Luminous Flux: 1100 Lumens

Colour Temperature (CCT): 3000K (Warm White)



Colour Consistency: 2-Step MacAdam Ellipse

Colour Rendering (CRI): >96 Ra (93 Re)

Efficacy: 81 Lumens per Circuit Watt

Lumen Maintenance: L70 B50 >50,000Hrs


Miscellaneous Weight: 345g (Luminaire + LED Driver)



INSTALLATION



Isolate electrical supply before undertaking any electrical work.
Installation must comply with the current wiring and building regulations.

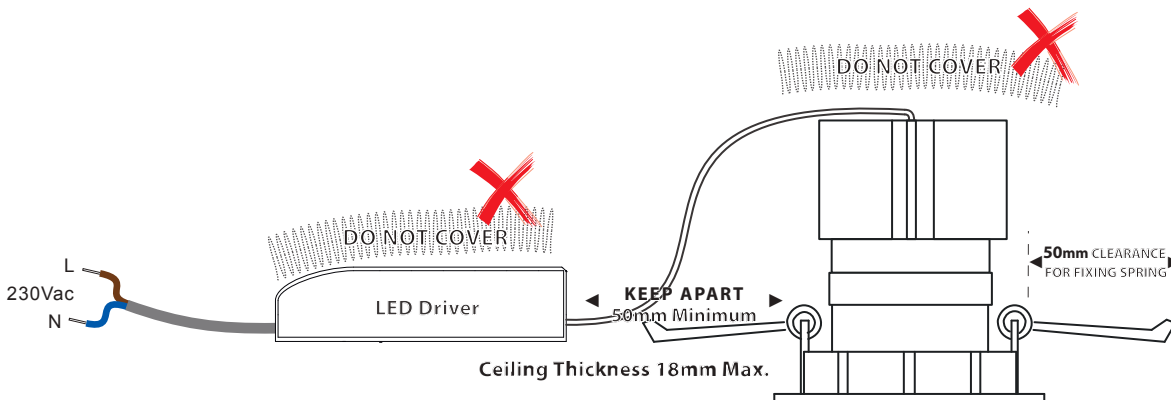

Drawing for illustrative purposes only, not an exact representation of the product.

AVAILABLE FROM:
FLAIRLIGHT DESIGNS LTD

(t) 01372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk

Do not disposed of these products with normal waste, use an authorised electrical recycling/disposal facility.