

PureLED

41001.10 Regressed Fixed Fluted Downlight

(t) 0 1372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk

TECHNICAL DATA





Luminaire:

- Ingress Protection Rating IP65
- Beam Angle: 36°
- Ingress Protection: IP65
- Bezel Finish: Matt White Textured Paint


- LED Driver: Input: 230Vac 0.050A 12W p.f. >0.9
- Output: 350mA 18-38Vdc
- Electrical Safety: Class II Pre-Wired Input Cable
- Mains Dimmable with Leading or Trailing Edge Dimmers

- Light Engine: Luminous Flux: 1100 Lumens
- Colour Temperature (CCT): 3000K (Warm White)
- Colour Consistency: 2-Step MacAdam Ellipse
- Colour Rendering (CRI): >96 Ra (93 Re)
- Efficacy: 81 Lumens per Circuit Watt
- Lumen Maintenance: L70 B50 >50,000Hrs


Miscellaneous Weight: 345g (Luminaire + LED Driver)



INSTALLATION



Isolate electrical supply before undertaking any electrical work.  
Installation must comply with the current wiring and building regulations.

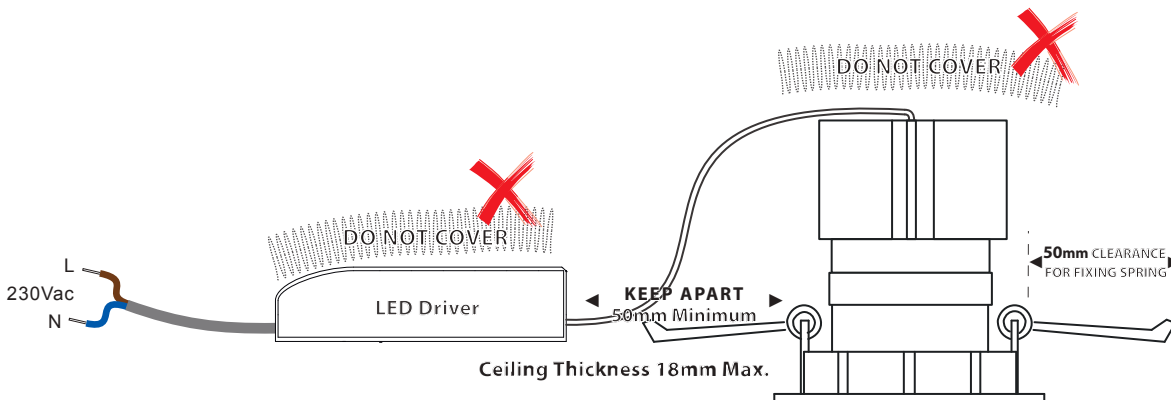

Drawing for illustrative purposes only, not an exact representation of the product.

AVAILABLE FROM:  
FLAIRLIGHT DESIGNS LTD

(t) 01372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk

Do not disposed of these products with normal waste, use an authorised electrical recycling/disposal facility.

