

PureLED

41002.10 Regressed Tilt Downlight

(t) 0 1372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk

TECHNICAL DATA



Luminaire:

Ingress Protection Rating IP20

Beam Angle: 36°

Ingress Protection: IP20

Bezel Finish: Matt White Textured Paint

LED Driver: Input: 230Vac 0.050A 12W p.f. >0.9

Output: 350mA 18-38Vdc

Electrical Safety: Class II Pre-Wired Input Cable

Mains Dimmable with Leading or Trailing Edge Dimmers

Light Engine: Luminous Flux: 1100 Lumens

Colour Temperature (CCT): 3000K (Warm White)



Colour Consistency: 2-Step MacAdam Ellipse

Colour Rendering (CRI): >96 Ra (93 Re)

Efficacy: 81 Lumens per Circuit Watt

Lumen Maintenance: L70 B50 >50,000Hrs

Miscellaneous Weight: 345g (Luminaire + LED Driver)



INSTALLATION




Isolate electrical supply before undertaking any electrical work.

Installation must comply with the current wiring and building regulations.



Hole Cut-Out
82mm Dia.

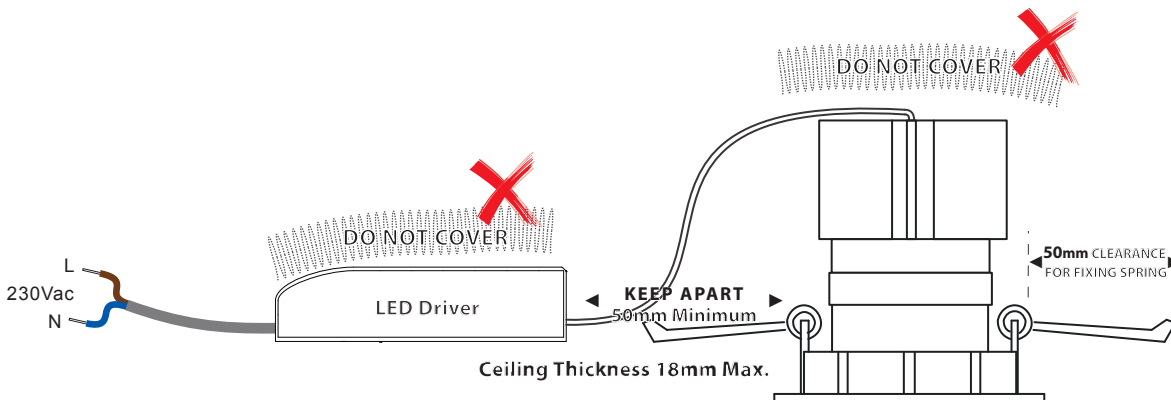

Drawing for illustrative purposes only, not an exact representation of the product.

AVAILABLE FROM:

FLAIRLIGHT DESIGNS LTD

(t) 01372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk

Do not disposed of these products with normal waste, use an authorised electrical recycling/disposal facility.

