

STUN

Fire Rated IP65 Regressed LED Downlight 40003.10

flairlight



Innovative lighting design

(t) 01372 888 455 (e) sales@flairlight.co.uk (w) www.flairlight.co.uk

TECHNICAL DATA



Light Source:	10W Cree 1507 COB LED
Luminous Flux:	900 Lumens
Colour Temp. (CCT)	3000K (Warm White)
Colour Consistency:	3-Step MacAdam Ellipse
Colour Rendering: (CRI)	>80 Ra
Beam Angle:	40°
Dimming:	Dimmable with Leading or Trailing Edge Mains Dimmers
Ingress Protection:	IP65
Electrical Safety:	Class III (SELV)
Fire Rated:	BS476 90Mins.
Bezel Finish:	Matt White
Dimensions:	See line drawing
Weight:	130g (Incl. Driver)
LED Driver: (Included)	Pre-wired, Mains Dimmable Input: 230Vac 12W 0.06A p.f. 0.9 Output: 240mA 52Vdc Max.

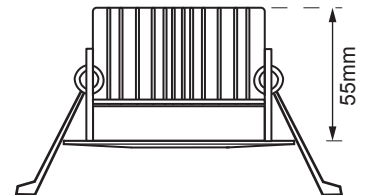

Designed in
London by
Flairlight

INSTALLATION



Isolate electrical supply before undertaking any electrical work.
Installation must comply with the current wiring and building regulations.



Cut-Out Dia.
72mm - 74mm

